

DSP-ZCT

영상전류 검출




(30 φ ~ 80 φ)




(100 φ ~ 200 φ)

Specification


관통구경	30	50	65	80	100	120	150	200
1차측 영상전류	200mA							
2차측 영상전류	1.5mA							
1차 전류	100	250	400	600	800	1000	1200	2000
사용온도	-25° C ~ +70° C							
보관온도	-35° C ~ +80° C							
절연 내압	"AC 2KV, 1min"							
절연 저항	"DC 500V, 10MΩ"							
사용주파수	50/60Hz							
허용오차	"±, - 10%"							
취부	Panel Type							
중량	170	215	275	345	590	785	1140	1500

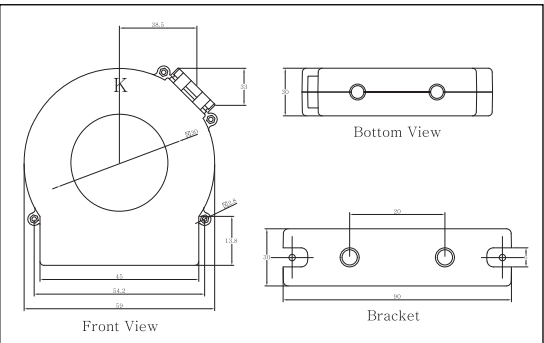

30 φ

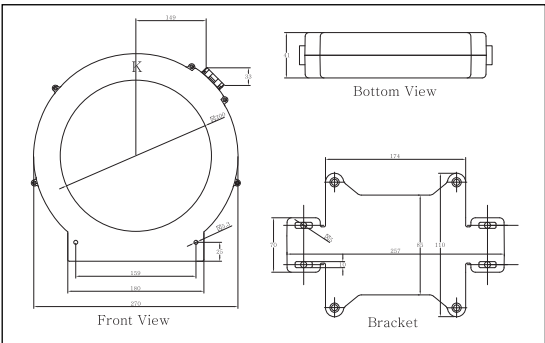

150 φ

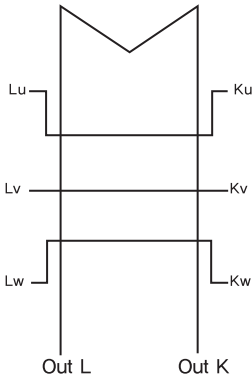

주문양식(Order Form)

Item	Inner diameter (mm)	Reference Code
DSP-ZCT	30	DSP-ZCT-30N
	50	DSP-ZCT-50N
	65	DSP-ZCT-65N
	80	DSP-ZCT-80N
	100	DSP-ZCT-100N
	120	DSP-ZCT-120N
	150	DSP-ZCT-150N
	200	DSP-ZCT-200N